



HIGH LOAD SPLIT MOUNT CLAMP

UNI/HLC/001

PARTS INCLUDED

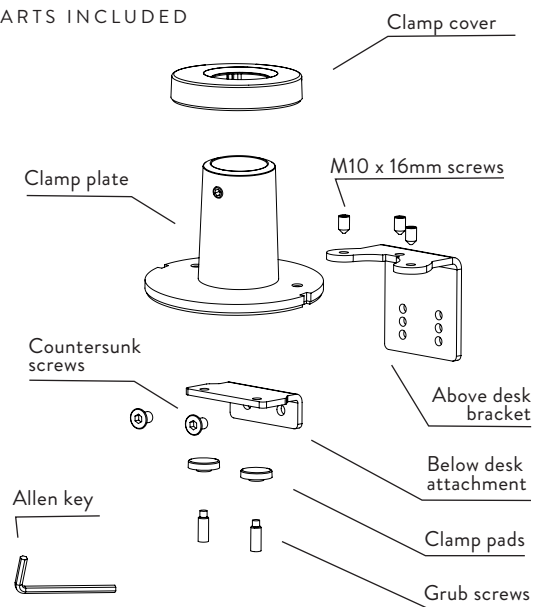


1 POSITION CLAMP PLATE ONTO WORK SURFACE

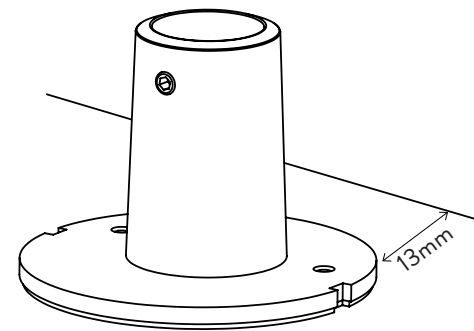

Position clamp 13mm from edge of desk

2 CONFIGURE CLAMP BRACKET

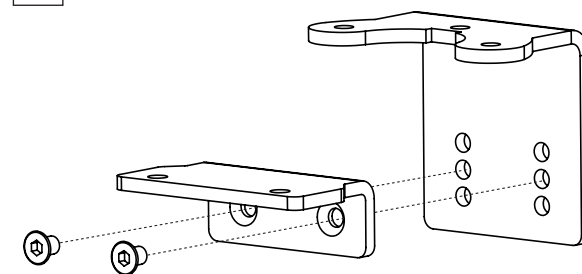

If required change the clamp plate setting by removing Countersunk screws and adjusting to correct setting


Regular maximum desk thicknesses

Setting 1: 12mm (1/2")
Setting 2: 24mm (1")
Setting 3: 36mm (1 1/2")


Inverted maximum desk thicknesses

Setting 4: 44mm (1 3/4")
Setting 5: 56mm (2 1/4")
Setting 6: 68mm (2 5/8")

3 INSTALL GRUB SCREWS AND CLAMP PADS

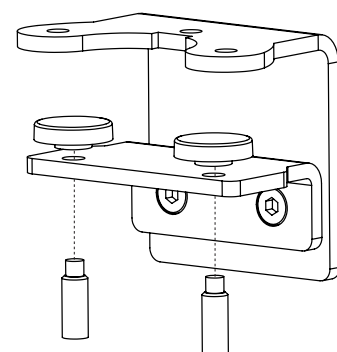


4 FIT CLAMP BRACKET

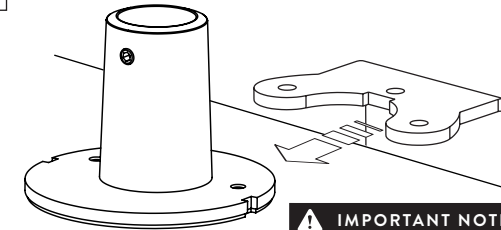


IMPORTANT NOTE
Ensure inside of bracket is flush against back of work surface


5 FIT M10 x 16 SCREWS

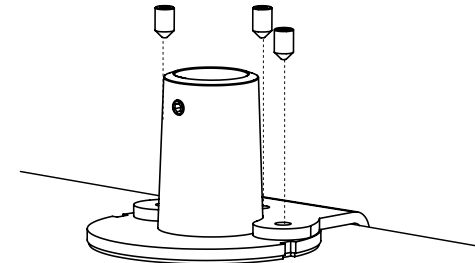

6 TIGHTEN GRUB SCREWS INTO POSITION

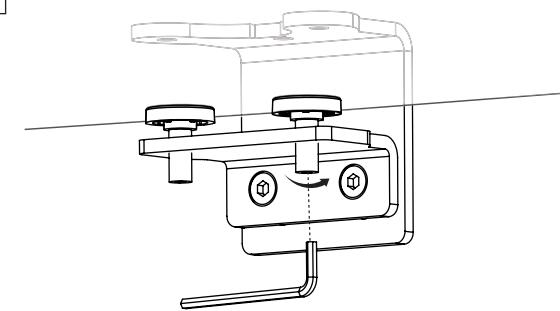


7 FULLY TIGHTEN M10 X 16 SCREWS

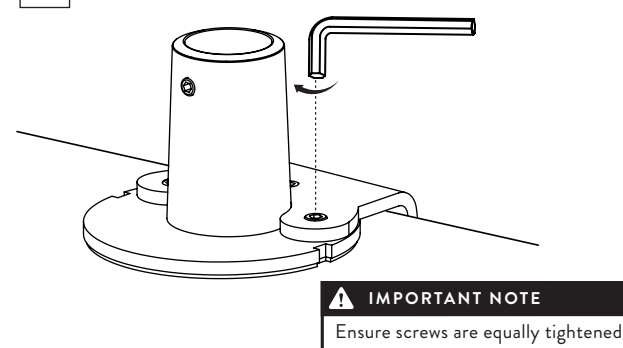


IMPORTANT NOTE
Ensure screws are equally tightened

8 FIT CLAMP COVER

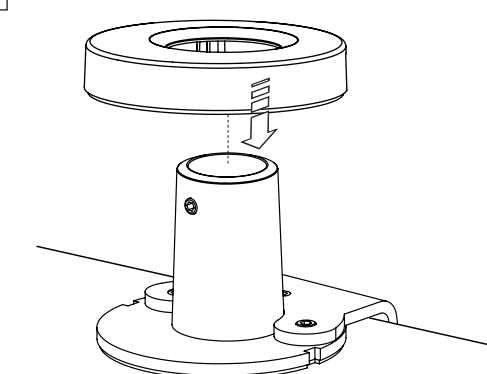

9 FIT POST

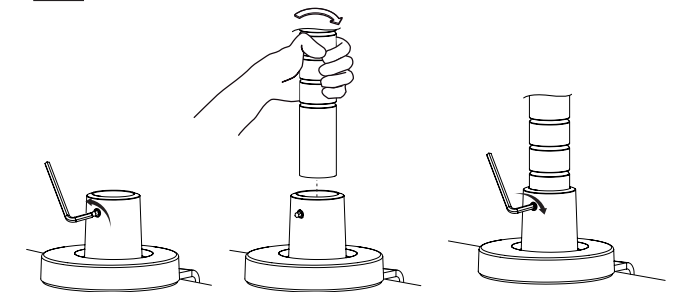


Loosen grub screw

Insert post

Tighten grub screw

IMPORTANT NOTE
Ensure post is fully inserted

ALTERNATIVE INSTALLATION METHOD FOR RESTRICTED GAP AT REAR OF WORK SURFACE

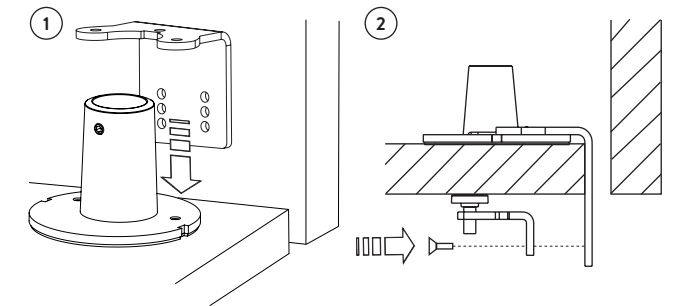

WARNING

- Do not use this product for any purpose other than that for which it was designed
- Ensure desk/work surface is suitable to take the weight of the arm/s and monitors
- Supported weight must not exceed the maximum load per arm
- Take care when installing as fingers could become trapped

MAINTENANCE AND INSPECTION

- Ensure all screws and fixings are fully tightened and occasionally re-tighten if necessary.
- Clean with a damp cloth. DO NOT use solvents.

DISCLAIMERS

- The use of power tools, lever bars or excessive force during the installation, or re-configuration of the product will invalidate your guarantee
- Failure to observe the recommendations in the use, and configuration of these products may affect your guarantee

PATENTS

Colebrook Bosson Saunders hold a number of patents and other intellectual property rights covering our products and processes. You can find patent information on our website at: www.colebrookbossonsaunders.com/patents

Please consider leaving these instructions with the product if further installation may be required by others